



Introduction

The Atlona **Gain™ 120 (AT-GAIN-120)** is a compact power amplifier designed for low or high impedance applications. A mode selector switch allows the Gain 120 to deliver two channels of 60 watts each into 4 or 8 ohms, or a single channel of 120 watts at 70 or 100 volts. This Class-D amplifier is energy efficient and ENERGY STAR qualified, and is also convection-cooled to allow installation in conference rooms and quiet installation environments without the need for fans. In addition to the amplified speaker output, a line level audio output allows the incoming audio to be fed into an additional amplifier or audio system. The Gain 120 is controllable via TCP/IP or external trigger, and can be integrated with Atlona AV switchers and OmniStream™ AV systems for a wide variety of sound reinforcement applications.

Available for the Gain 120 is the AT-GAIN-NET networked audio card, featuring an AES67 and Dante dual-channel audio bridge. The AT-GAIN-NET adds the capability to accept two channels over a network from a Dante or AES67-equipped DSP, as well as Atlona OmniStream AV encoders.

Applications


- **Meeting rooms, conference rooms, training rooms, and classrooms**
The Gain 120 can receive audio from an Atlona AV switcher or DSP, and then feed the audio to program speakers on the front wall, or a distribution of ceiling speakers.
- **Facility audio systems**
The Gain 120 can be integrated with a centralized audio distribution system for paging and background music, as well as audio content targeted to specific zone.

Key Features


- Selectable low or high impedance operation.
- 2 x 60 watts @ 4 or 8 ohms.
- 1 x 120 watts @ 70 or 100 volts.
- Class-D efficient amplifier design.
- ENERGY STAR® qualified.
- Convection cooled – no need for fans.
- Optional AES67 / Dante™ networked audio interface (AT-GAIN-NET) – receives two-channel audio from OmniStream AV encoders or compatible audio devices.
- Available AT-RACK-1RU rack shelf – required accessory for rack installation⁽¹⁾.
- Automatic standby, configurable from 5 to 25 minutes of inactivity, to minimize power consumption.
- Rear panel input level controls.
- Integrated protection circuitry automatically activates in the event of clipping, short circuit, thermal overload, and more.
- Low inrush current to prevent audible “thumps” when multiple amps are powered on simultaneously.
- Balanced line-level output for pass-through to an additional amplifier or audio system.
- Integrated five-band equalizer.
- TCP/IP control of volume level, muting, and EQ.
- Ideal for IP-based control from Atlona Velocity™ Control System.
- Trigger port ideal for occupancy sensor or control system to remotely power down amplifier or wake from standby.
- Front panel signal status LEDs for power, signal presence, real-time volume level, device identification, and internal protection activation.
- Rack-mountable 1U, half rack width enclosure.
- Includes installation guide, power cable (US), and captive screw connectors.

Connection Diagrams

- **AT-GAIN-120**

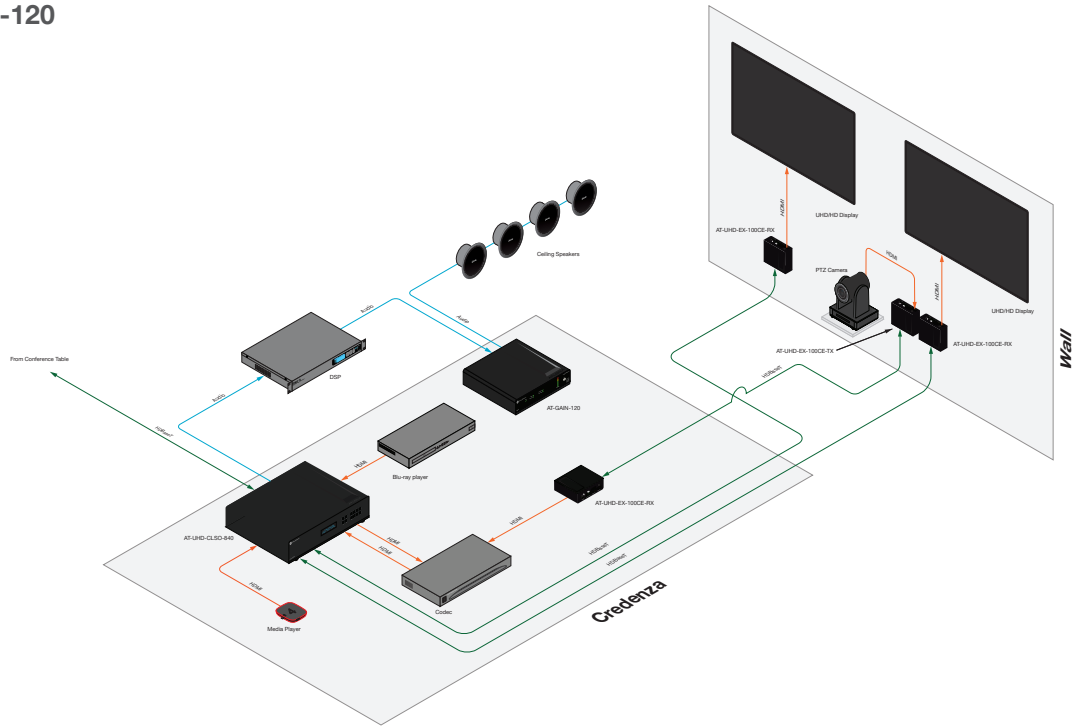

- **AT-GAIN-120 with AT-GAIN-NET networked audio card**

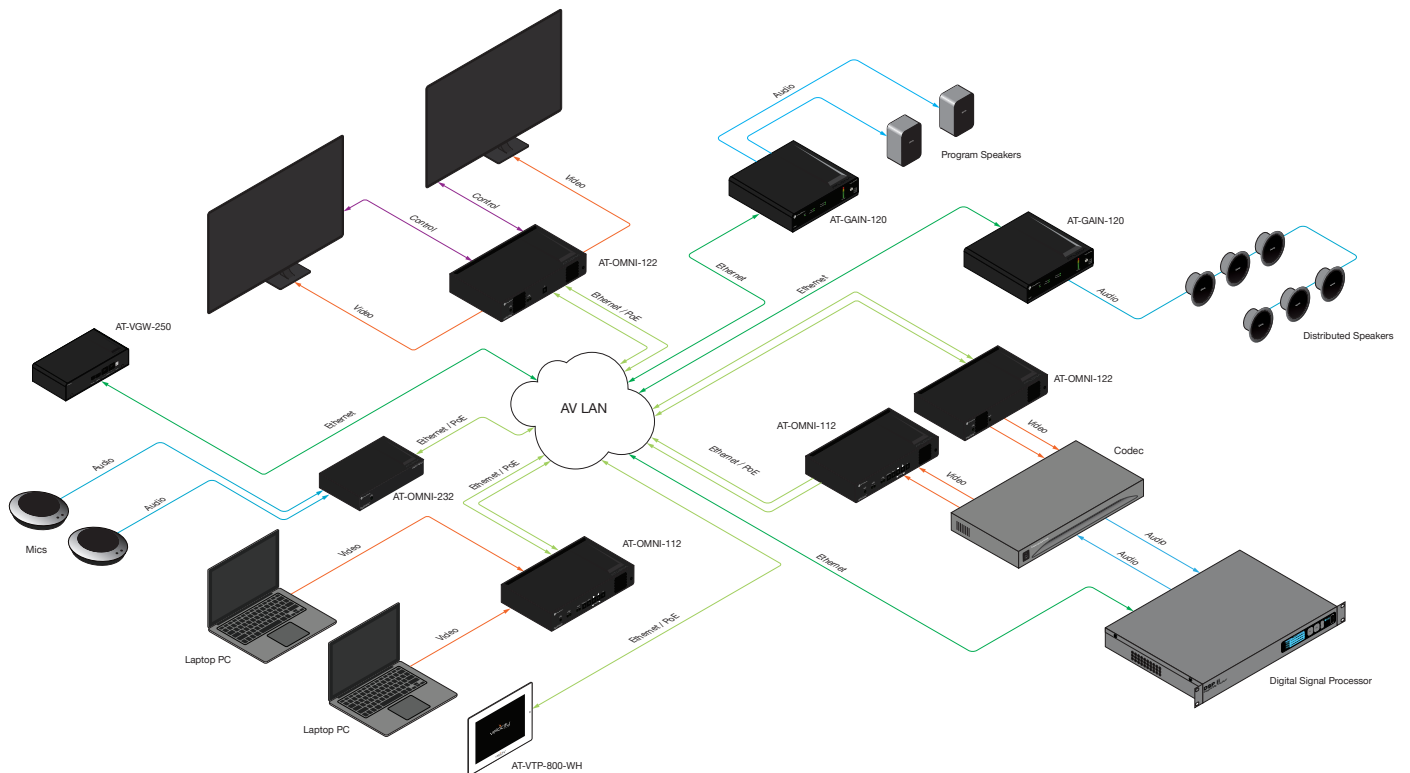

Specifications

Connectors, Controls, and Indicators	
INPUT	1 - RJ45 (AT-GAIN-NET network audio card, only), 100 Mbps
LAN	1 - RJ45
ANALOG IN	1 - 5-pin captive screw, balanced: 20 k Ω , unbalanced: 10 k Ω
LINE OUT	1 - 5-pin, 3.5mm
TRIGGER	1 - 2-pin captive screw
4 / 8 Ω OUT	1 - 4-pin, 5.08 mm lock-down screw connector
70V / 100V OUT	1 - 5-pin, 3.5mm
FW	1 - mini-USB, type-B
INPUT GAIN	2 - Rotary pots, L/R channel
MODE	1 - Slider switch, 4-pole, 4 Ω / 8 Ω / 70 V / 100 V
RESET	1 - Push button, tact-type
IP RESET	1 - Push button, tact-type
Power	1 - IEC power receptacle
PWR	1 - LED indicator, green
SIGNAL	1 - LED indicator, green
DEVICE ID	1 - LED indicator, green
ANALOG IN	1 - LED indicator, green
NET AUDIO	1 - LED indicator, green
VOL LEVEL	1 - Multi-LED indicator

Input Signal	
Analog Input	Balanced: 20 k Ω , unbalanced: 10 k Ω
CMRR	51 dB / 58 dB
Detection Threshold	0 dBV = 2.218 dBu

Output Signal	
Distributed speakers (mono)	70 V / 100 V
Program speakers (stereo)	4 Ω / 8 Ω , line-level
Power	70 V = 120 Vrms (bridge mode) 100 V = 120 Vrms (bridge mode) 4 / 8 Ω = 60 W per channel

Audio Processing	
D/A Conversion	24-bit, selectable sampling rate
Audio Formats	24-bit uncompressed, selectable at 44.1, 48, 88.2, and 96 kHz sampling rate
Latency	2 ms
Signal Processing	Volume, Auto on/off signal sensing, 80 Hz HPF
Network Audio Transport	Dante, AES67
Equalization	5-band, adjustable: 40 Hz, 150 Hz, 500 Hz, 2 kHz, and 10 kHz bands Range: -10 dB to +10 dB

Audio Performance	
Frequency Response	20 Hz - 20 kHz, ± 2 dB @ 4 Ω load
THD + N	< 0.1% @ 1kHz, 3 db below clipping
SNR	> 90 dBA WTD
Damping Factor	< 90 @ 8 Ω
Amplifier Type	Class D

Temperature	Fahrenheit	Celsius
Operating	32 °F to 122 °F	0 °C to 50 °C
Storage	-40 °F to 158 °F	-40 °C to 70 °C
Humidity (RH)	90% RH, non-condensing	

Power	
Standby Mode	Powers down after 5 - 25 minutes (adjustable) of no signal; complies with ENERGY STAR power consumption limits of < 0.5 W in standby mode
Consumption	120 W (max.)
Standby Consumption	normal standby < 0.5 W network standby < 2 W
Supply	100 - 240 V AC, 50/60 Hz, 120 W

Dimensions	Inches	Millimeters
H x W x D	1.69 x 8.66 x 12.99	43 x 220 x 330

Weight	Pounds	Kilograms
Device	19.84	9

Certification	
Device	CE, FCC, CB, RoHS, WEEE, FCC, ENERGY STAR®

(1) The AT-RACK-1RU rack shelf is a required accessory to ensure a proper, secure rack installation. Additionally, 2U of space will be required to install the Gain 120 in a rack.

Copyright, Trademark, and Registration

© 2021 Atlona Inc. All rights reserved. "Atlona" and the Atlona logo are registered trademarks of Atlona Inc. Pricing, specifications and availability subject to change without notice. Actual products, product images, and online product images may vary from images shown here.