

PAINT  [®]

TRANSFERABLE ENGINE



ROBE [®]

PAINTE®

TRANSFERABLE ENGINE

310W WHITE
TE™
LED ENGINE

14.900 lm
FIXTURE
TOTAL
LUMEN OUTPUT

ZOOM
RANGE
8° - 48°

SMALL, COMPACT
LIGHTWEIGHT
BODY
ONLY 19.6 KG

CMY
COLOUR WHEEL
VIRTUAL CTO

PLANO4™
FRAMING
SHUTTER
SYSTEM



PAINTE®

ROBE



DMX 001 IP: 2.245.18.104

ESCAPE

NEXT

PREV

ENTER
DISPLAY ON

RNS2
RNS NAVIGATION
SYSTEM 2

ROBE®



PAINTE® delivers the perfect compact, quiet, quality profile solution for short to medium throw scenarios in theatrical, television, installation, live or corporate settings to create your masterpiece!

Whether broad brush strokes or adding the finest detail, PAINTE® delivers the master's touch. Colours are boundless via the advanced CMY colour mixing system. From its compact frame, PAINTE® punches way above its weight, with an impressive 14.900-lumen fixture output of sparkling, clear, white light.

Designed for noise-sensitive environments, PAINTE® features the TE™ 310W HP White LED engine from our ground-breaking TRANSFERABLE ENGINE technology. The high-performance engine gives you the ability to easily maintain light quality and consistency across your inventory.

The motorised zoom gives a range of 8° - 48°, perfect for short to medium throw applications.

Precise beam control is via our highly advanced, patented, Plano4™ four individual plane shutter system. With 120-degree module rotation, each individual blade has a full curtain effect capability.

PAINTE® is packed with Robe innovation including CPulse™ flicker-free management system for HD and UHD cameras; L3™ Low Light Linearity dimming software for imperceptible fades to black; AirLOC™ (Less Optical Cleaning) technology keeping the optical elements in pristine condition for far longer; EMS™ Electronic Motion Stabiliser technology for enhanced fixture stability.

The fast, feature-packed, small footprint PAINTE® lets you brush in the finest detail or boldest statement with Robe quality.

PAINTE® - The Palette of CreativITE

Source

- Light source type: **TE™ 310W HP White LED Engine** (Patented):
 - HP - High Performance Engine for maximum light output and optimal colour characteristics
 - LED Engine output: 18.500 lm
 - Fixture total lumen output: 14.900 lm (integrating sphere) 12.000 lm (goniophotometer)
 - Colour temperature output: 6.700 K
 - CRI: 70, remotely selectable filter for CRI 90
 - Illuminance: 24.000 lx @ 5 m
- Light source type: **TE™ 310W HCF White LED Engine** (Patented):
 - HCF - High Colour Fidelity Engine for the best light quality and colour rendition
 - LED Engine output: 13.000 lm
 - Fixture total lumen output: 9.800 lm (integrating sphere) 7.800 lm (goniophotometer)
 - Colour temperature output: 6.000K
 - CRI: 96, TLCI: 97, TM-30-18 Rf: 92, TM-30-18 Rg: 99
 - Illuminance: 16.000 lx @ 5 m
 - LED life expectancy: min. 50.000 hours
 - Typical lumen maintenance: L70/B50 @ 50.000 hours
 - Light source warranty: 4 years or 20.000 hours

Optical System

- Robe's proprietary optical design
- High-efficiency 13-lens zoom optical system, ratio: 6:1
- Zoom range: 8°-48°
- Output lens diameter: 110mm

Dynamic Effects and Features

- Cyan: 0-100%
- Magenta: 0-100%
- Yellow: 0-100%
- Virtual CTO
- + - Green correction function
- Colour Wheel: 9 dichroic filters + white
- Rotating gobo wheel: 8 rotating, indexable and replaceable breakup and aerial gobos + open, patented slot & lock system
- Static gobo wheel: 9 gobos + open
- Full curtain framing shutters: Patented Plano4™ framing shutters module with 4 individually positionable blades plus rotation of the complete framing system +-60°
- Prism: 8-facet prism rotating in both directions at variable speed
- Iris: Motorized, stepless, pulse effects up to 3 Hz
- MagFrost™ - magnetic paddle fast change system providing exchangeable frost containing as standard a medium 5° for even wash
- Motorized zoom and focus
- Electronic strobe effect with variable speed up to 20 Hz
- Extremely quiet operation suitable for all types of production in Theatre and TV
- L3™ - (Low Light Linearity) Imperceptible 18 bit dimming for ultra smooth fade to black
- Cpulse™- special flicker-free management for HD and UHD cameras, ready for 8K and 16K

- AirLOC™ - (Less Optical Cleaning) technology greatly reduces the level of airborne particles drawn over the optical elements. This increases the overall performance, light quality and time between routine cleaning and maintenance.

Control and Programming

- Setting & Addressing: ROBE Navigation System 2 (RNS2)
- Display: QVGA Robe touch screen with battery backup, gravitation sensor for auto screen positioning, operation memory service log with RTC, stand-alone operation with 3 editable programs (each up to 100 steps), built-in analyser for easy fault finding
- Protocols:
 - USITT DMX-512, RDM
 - ArtNet, MA Net, MA Net2, sACN
 - REAP™ - Robe Ethernet Access Portal
 - Wireless CRMX™ technology from Lumen Radio - on request
- Epass™ - Ethernet pass through switch which sustains Ethernet integrity, when the fixture has no power, to automatically maintain network connectivity - on request
- DMX Protocol modes: 2
- Control channels: 44, 45
- Pan & Tilt resolution: 16 bit
- CMY: 8 bit
- Framing shutters module movement & rotation: 8 bit
- Rotating gobo wheel positioning: 8 bit
- Gobo indexing & rotation: 8 or 16 bit
- Static gobo wheel positioning: 8 or 16 bit
- Prism indexing & rotation: 8 bit
- Iris: 8 or 16 bit
- Frost: 8 bit
- Zoom: 8 or 16 bit
- Focus: 8 or 16 bit
- Dimmer: 16 bit (internal 18 bit)

Movement

- Pan movement: 540°
- Tilt movement: 270°
- Controllable speed of Pan & Tilt movement
- EMS™: Electronic Motion Stabilizer system for Pan & Tilt reducing beam deviation caused by truss movement or vibration (Patented)
- Automatic Pan & Tilt position correction

Rotating Gobos

- Glass gobos: 8 rotating gobos + open
- Outside diameter: 15.9 mm
- Image diameter: 12.5 mm
- Thickness: 1.1 mm
- High temperature borofloat or better glass
- Patented slot & lock system for easy replacement of gobos

Static Gobos

- Aluminium wheel with fixed gobos: 9 gobos + open position

Framing Shutters System

- Full curtain framing shutters: 4 Blades, each with separate movement and rotation control
- Movement: Smooth with variable speed, ultrafast blade movements for creating mid-air effects
- Rotation: +- 60° of the complete framing system

Thermal Specification

- Maximum ambient temperature: 45 °C (113 °F)
- Maximum surface temperature: 80 °C (176 °F)
- Minimum operating temperature: -5 °C (23 °F)
- Total heat dissipation: max. 1126 BTU/h (calculated)

Electrical Specification and Connections

- Power supply: Electronic auto-ranging
- Input voltage range: 100-240 V, 50/60 Hz
- Power consumption: max. 440 W
- Power connector in: Neutrik powerCON TRUE1
- DMX and RDM data in/out: Locking 5-pin XLR
- Ethernet port in: RJ45
- Ethernet port in/out: RJ45 for Embedded Epass™ switch 10/100 Mbps - on request

Approvals

- CE Compliant
- cETLus Compliant

Mechanical specification

- Height: 619 mm (24.4") - Head in vertical position
- Width: 367 mm (14.4")
- Depth: 219 mm (8.6") - Head in vertical position
- Weight: 19.6 kg (43.2 lbs)
- Ingress protection rating: IP20

Rigging

- Mounting positions: Horizontally or vertically
- Universal operating position
- Mounting points: 2 pairs of 1/4-turn locking points
- 2x Omega adaptors with 1/4-turn quick locks
- Pan & Tilt transport locks

Included Items

- User Manual
- Omega Adaptor CL-regular 2 pcs
- Power cord including powerCON TRUE1 In connector



Optional Accessories


- Frost 0.5° (exchange) assembled: 10980690
- Frost 1° (exchange) assembled: 10980691
- Frost 3.5° (exchange) assembled: 10980758
- Frost 10° (exchange) assembled: 10980693
- Frost 20° (exchange) assembled: 10980694
- Frost 30° (exchange) assembled: 10980695
- Doughty Trigger Clamp: 17030386
- Safety wire 36 kg: 99011963
- Single Top Loader Case: 10120287
- Dual Top Loader Case: 10120288
- Quad Top Loader Case: 10120289
- Foam Shell: 20020444

Legal


- PAINTE® is Registered Trademark of Robe lighting s. r. o.
- PAINTE® is patented by Robe lighting s. r. o. and is protected by one or more pending or issued patents








Rotating Gobo Wheel

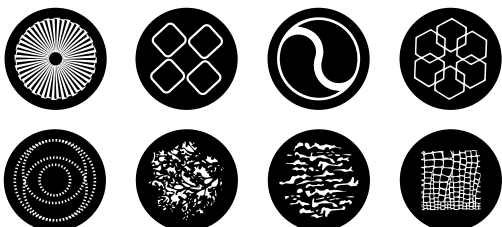

Static Gobo Wheel

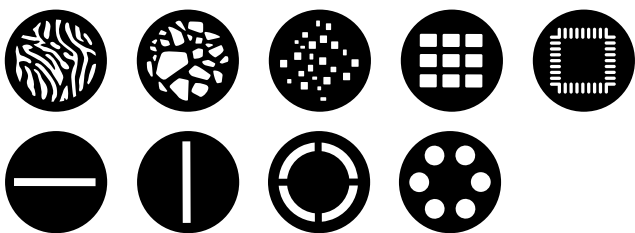

Colour Wheel

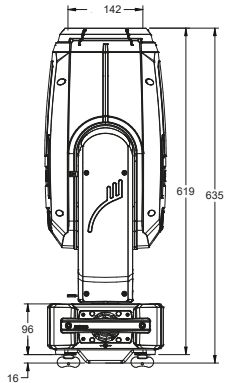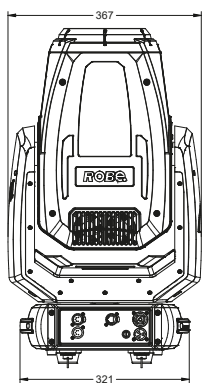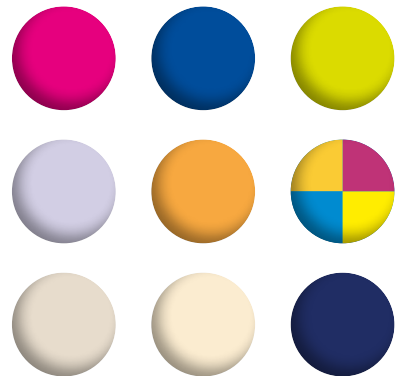


PAINTE HP

Photometric report

Beam angle 8.6° - Min. Zoom


Beam angle	Total lumen output (integrating sphere)	Total lumen output (goniophotometer)	Peak candela	Power
8.6°	9771 lm	8883 lm	598850 cd	421 W

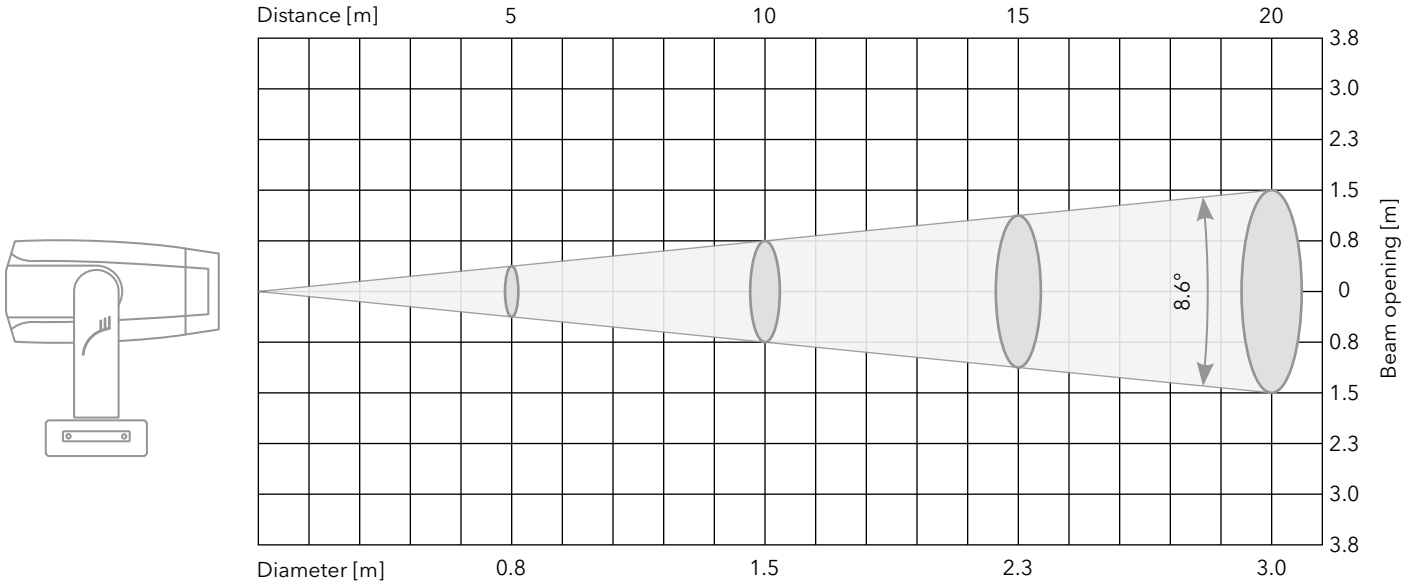


Center beam intensity [lx]/[fcd]; Total lumen output [lm] measured by goniophotometer

Distance	5 m	10 m	15 m	20 m	30 m	40 m	50 m	Total lumens
High Fan Mode	23954/2225	5989/556	2662/247	1497/139	665/62	374/35	240/22	8883
Auto Fan Mode	22953/2132	5738/533	2550/237	1435/133	638/59	359/33	230/21	8512
Quiet Fan Mode	15358/1427	3840/357	1706/159	960/89	427/40	240/22	154/14	5695


Spectrum

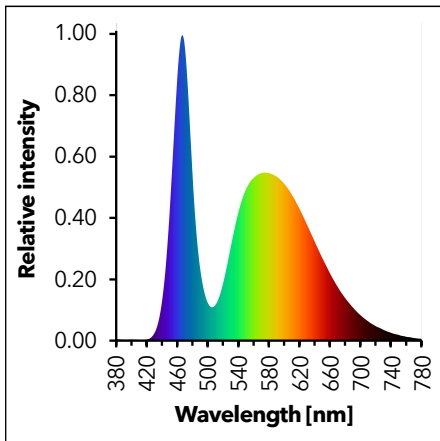

TM-30

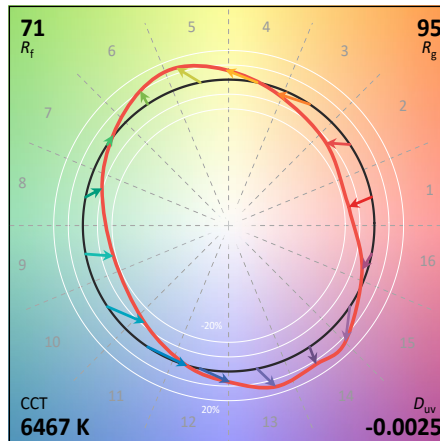

Light distribution

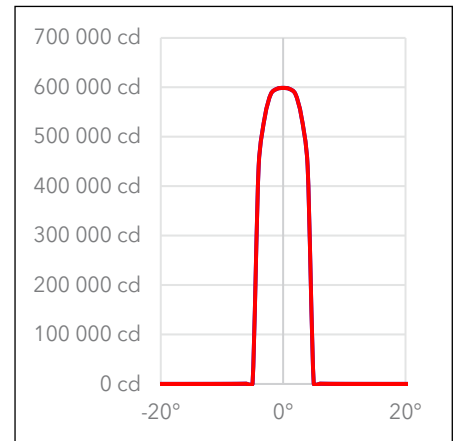

Color temperature	CCT	6467
Color Deviation from Black	D_{uv}	-0.0025
Color Coordinate CIE 1931	x	0.3146
	y	0.3200
Color Coordinate	u	0.2026
	v	0.3091

Color rendering index	CRI	72
Red component	CRI R9	-16
Color fidelity	TM30 R_f	71
Color gamut	TM30 R_g	95
Television consistency Index	TLCI	47


Fixture settings: DMX mode: 1; Fans: High; Dimmer curve: Square Law; Shutter: Open; Dimmer: Open; No effect in light beam
Measurement date: 24.03.2022

PAINTE HP

Photometric report

Beam angle 47.3° - Max. Zoom


Beam angle	Total lumen output (integrating sphere)	Total lumen output (goniophotometer)	Peak candela	Power
47.3°	14991 lm	11993 lm	23625 cd	421 W

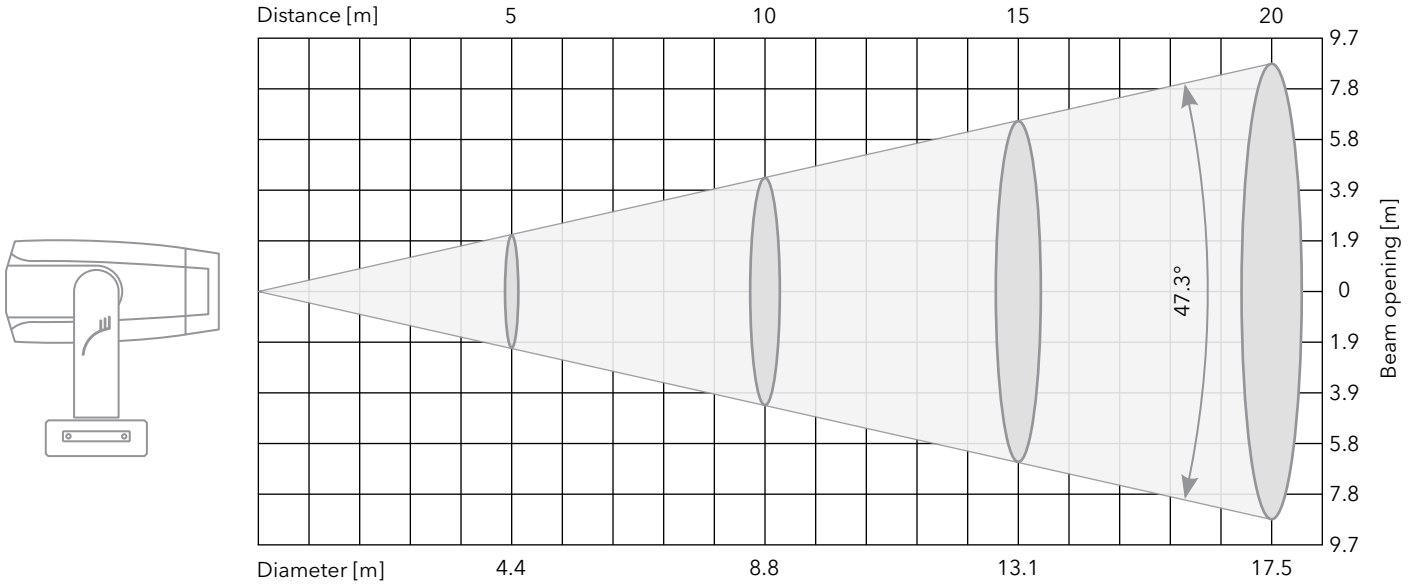


Center beam intensity [lx]/[fcd]; Total lumen output [lm] measured by goniophotometer

Distance	5 m	10 m	15 m	20 m	30 m	40 m	50 m	Total lumens
High Fan Mode	945/88	236/22	105/10	59/5	26/2.4	15/1.4	9/0.9	11993
Auto Fan Mode	906/84	227/21	101/9	57/5	25/2.3	14/1.3	9/0.8	11498
Quiet Fan Mode	606/56	152/14	67/6	38/3.5	17/1.6	9/0.9	6/0.6	7691


Spectrum

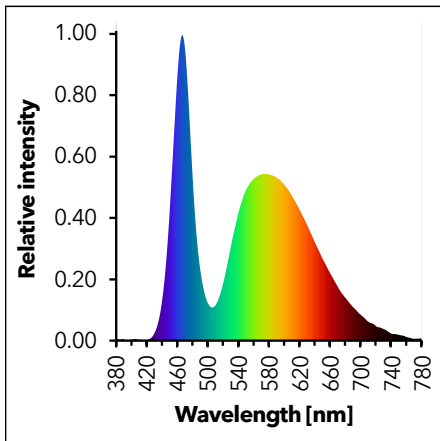

TM-30

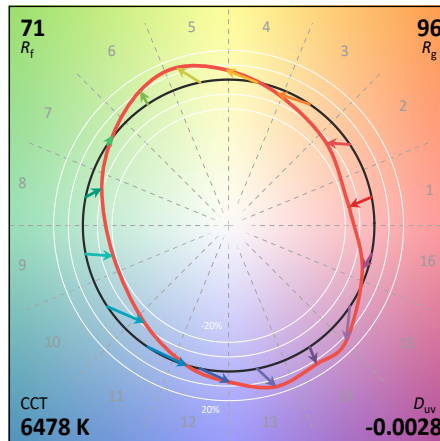

Light distribution

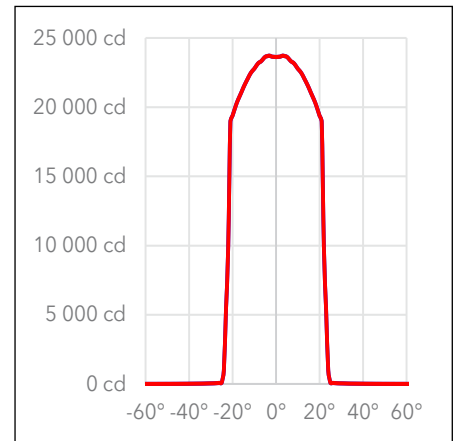

Color temperature	CCT	6478
Color Deviation from Black	Duv	-0.0028
Color Coordinate CIE 1931	x	0.3145
	y	0.3192
Color Coordinate	u	0.2028
	v	0.3088

Color rendering index	CRI	73
Red component	CRI R9	-15
Color fidelity	TM30 Rf	71
Color gamut	TM30 Rg	96
Television consistency Index	TLCI	47


Fixture settings: DMX mode: 1; Fans: High; Dimmer curve: Square Law; Shutter: Open; Dimmer: Open; No effect in light beam
 Measurement date: 24.03.2022

PAINTE HCF

Photometric report

Beam angle 8.6° - Min. Zoom


Beam angle	Total lumen output (integrating sphere)	Total lumen output (goniophotometer)	Peak candela	Power
8.6°	6361 lm	5783 lm	382225 cd	421 W

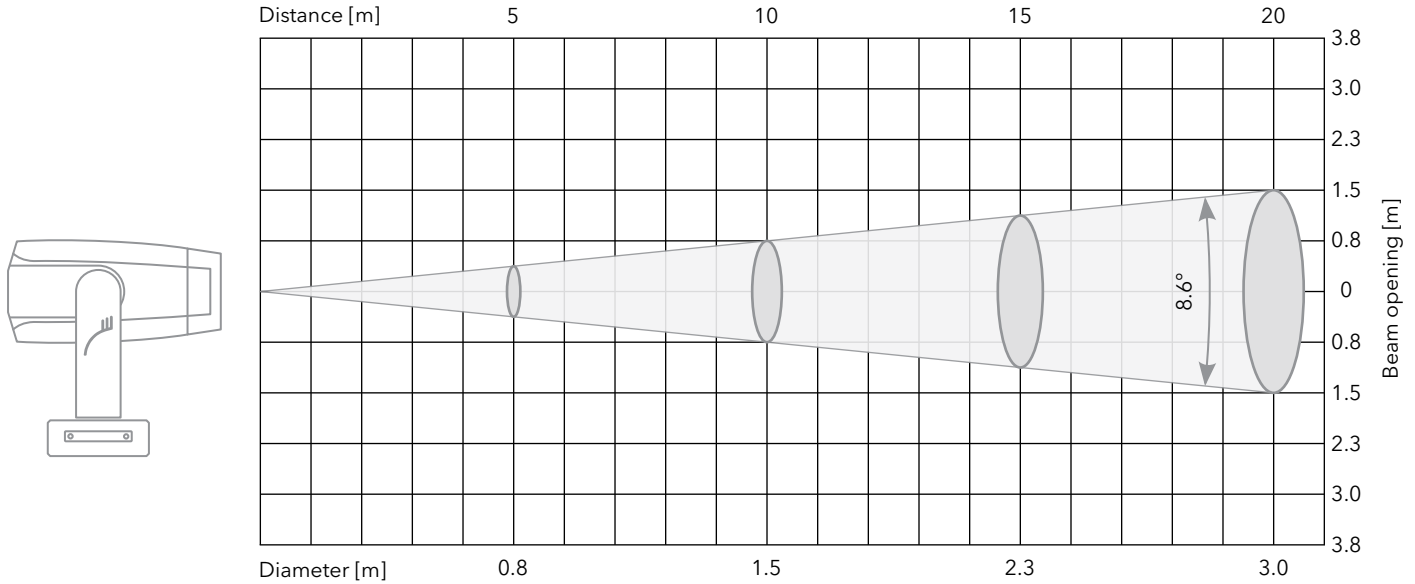


Center beam intensity [lx]/[fcd]; Total lumen output [lm] measured by goniophotometer

Distance	5 m	10 m	15 m	20 m	30 m	40 m	50 m	Total lumens
High Fan Mode	15289/1420	3822/355	1699/158	956/89	425/39	239/22	153/14	5783
Auto Fan Mode	14650/1361	3663/340	1628/151	916/85	407/38	229/21	147/14	5541
Quiet Fan Mode	9802/911	2451/228	1089/101	613/57	272/25	153/14	98/9	3708


Spectrum

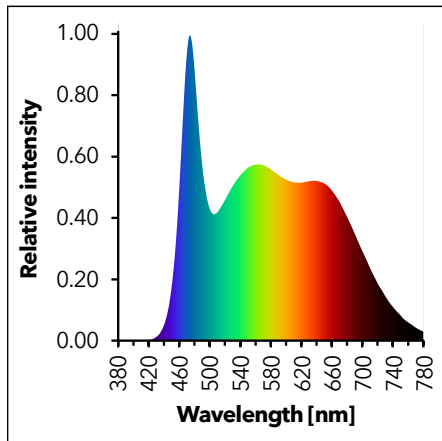

TM-30

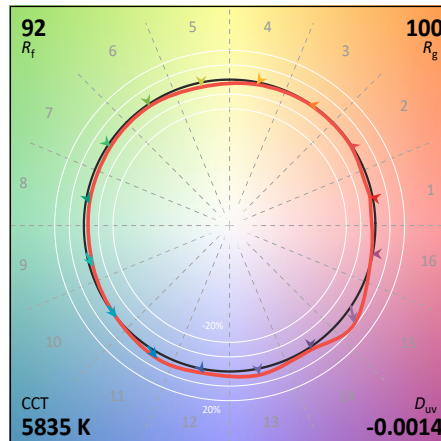

Light distribution

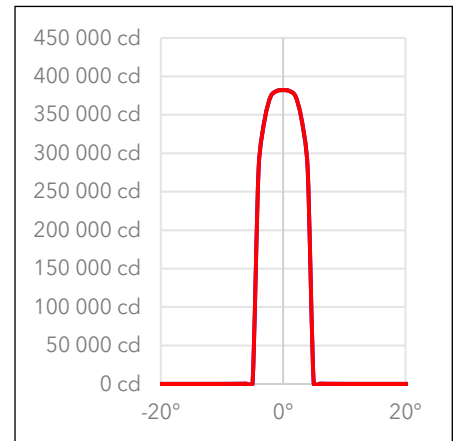

Color temperature	CCT	5835
Color Deviation from Black	D_{uv}	-0.0014
Color Coordinate CIE 1931	x	0.3254
	y	0.3322
Color Coordinate	u	0.2054
	v	0.3146

Color rendering index	CRI	97
Red component	CRI R9	95
Color fidelity	TM30 R_f	92
Color gamut	TM30 R_g	100
Television consistency Index	TLCI	97


Fixture settings: DMX mode: 1; Fans: High; Dimmer curve: Square Law; Shutter: Open; Dimmer: Open; No effect in light beam
 Measurement date: 03.03.2023

PAINTE HCF

Photometric report

Field angle 47.3° - Max. Zoom


Field angle	Total lumen output (integrating sphere)	Total lumen output (goniophotometer)	Peak candela	Power
47.3°	9759 lm	7807 lm	13675 cd	421 W

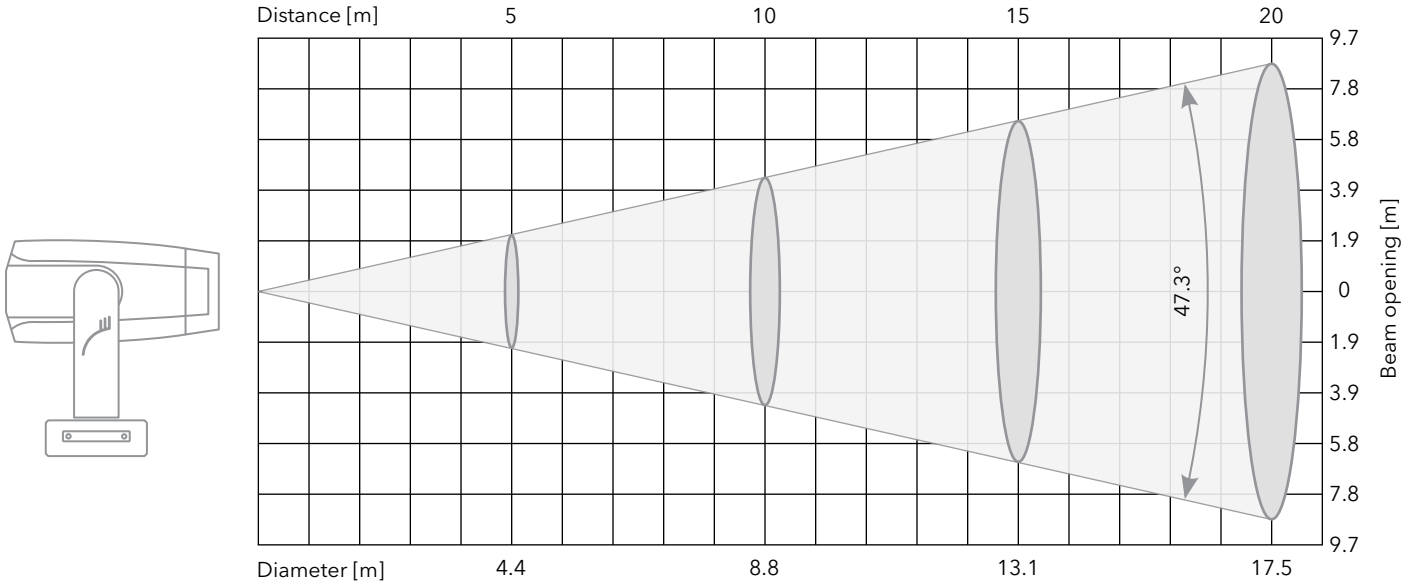


Center beam intensity [lx]/[fcd]; Total lumen output [lm] measured by goniophotometer

Distance	5 m	10 m	15 m	20 m	30 m	40 m	50 m	Total lumens
High Fan Mode	547/51	137/13	61/6	34/3.2	15/1.4	9/0.8	5/0.5	7807
Auto Fan Mode	524/49	131/12	58/5	33/3	15/1.4	8/0.8	5/0.5	7479
Quiet Fan Mode	351/33	88/8	39/3.6	22/2	10/0.9	5/0.5	3.5/0.3	5010


Spectrum

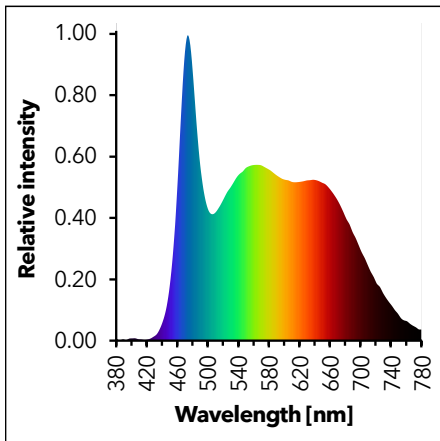

TM-30

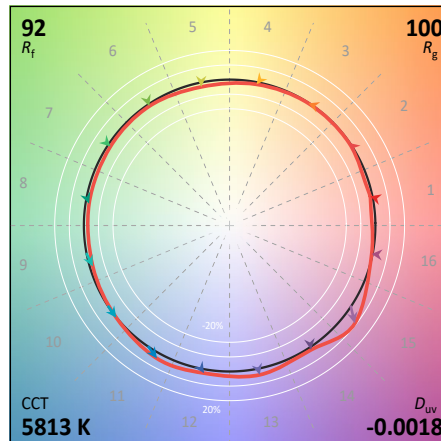

Light distribution

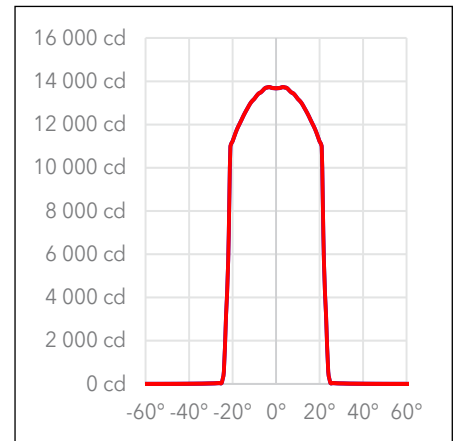

Color temperature	CCT	5813
Color Deviation from Black	D_{uv}	-0.0018
Color Coordinate CIE 1931	x	0.3259
	y	0.3318
Color Coordinate	u	0.2059
	v	0.3145

Color rendering index	CRI	97
Red component	CRI R9	97
Color fidelity	TM30 R_f	92
Color gamut	TM30 R_g	100
Television consistency Index	TLCI	97

Fixture settings: DMX mode: 1; Fans: High; Dimmer curve: Square Law; Shutter: Open; Dimmer: Open; No effect in light beam
 Measurement date: 03.03.2023

PAINT[®]

TRANSFERABLE ENGINE



www.robe.cz



Head office: ROBE lighting s. r. o. | Házovice 2090 | 756 61 Rožnov pod Radhoštěm | Czech Republic

Factory: ROBE lighting s. r. o. | Palackého 416 | 757 01 Valašské Meziříčí | Czech Republic

Tel.: +420 571 751 500 | E-mail: robe@robe.cz

March 2023 © ROBE lighting s. r. o. All specifications subject to change without notice.